



yellobrik®


yellobrik®

Quick Reference

Technical Specifications

| | | | | | |
|--------------------|--|--|--------------|---------|----------|
| SDI Video | 2x 12G-SDI inputs on 75 Ohm BNC connectors | | | | |
| | 2x 12G-SDI outputs on 75 Ohm BNC connectors | | | | |
| | SMPTE 2082-1, SMPTE 2081-1, SMPTE 424M, SMPTE 292M, SMPTE 259M | | | | |
| | Multi-standard operation from 270Mbit/s to 12Gbit/s | | | | |
| | Multirate reclocking: 270Mbit/s - 1.5Gbit/s - 3Gbit/s - 6Gbit/s - 12Gbit/s | | | | |
| Automatic cable EQ | 270Mbit/s | 1.5Gbit/s | 3Gbit/s | 6Gbit/s | 12Gbit/s |
| | 250m | 220m | 150m | 80m | 80m |
| | Belden 1694A | | Belden 4794R | | |
| Fiber Optic | 2x fiber inputs, 2x fiber outputs | | | | |
| | 2x Duplex (singlemode) transceivers using LC/PC connection | | | | |
| | SMPTE 297M - 2006 | | | | |
| | Transmitter | Wavelength | 1310nm | | |
| | Optical power | -3dBm (typ) | | | |
| Receiver | Wavelength | 1260nm - 1620nm | | | |
| | Sensitivity | -2dBm to -10dBm | | | |
| | Max. distance* | 10km (6.2 miles) | @ 12Gbit/s | | |
| | TX & RX active LEDs on side of module | | | | |
| Power | +12V DC @ 3.4W excl. SFPs - (supports 7 - 24V DC input range) | | | | |
| | Power LED on side of module | | | | |
| Physical | Size | 140mm x 83.8mm x 22mm | | | |
| | (incl. connectors) | (5.51" x 3.29" x 0.86") | | | |
| | Weight: | 168g/6oz excl. SFPs, 268g/9.5oz incl. SFPs | | | |
| Ambient | 5 - 40°C (41 - 104°F) 90% Humidity (non condensing) | | | | |
| Model # | OTR 1414 | 4250479329652 | | | |
| | OTR 1414 CW | 4250481129929 | | | |
| Includes | Module, Power Supply, 2x TR SFPs (only non-CWDM version) | | | | |

OTR 1414 4-Channel 12G-SDI Fiber Transmitter

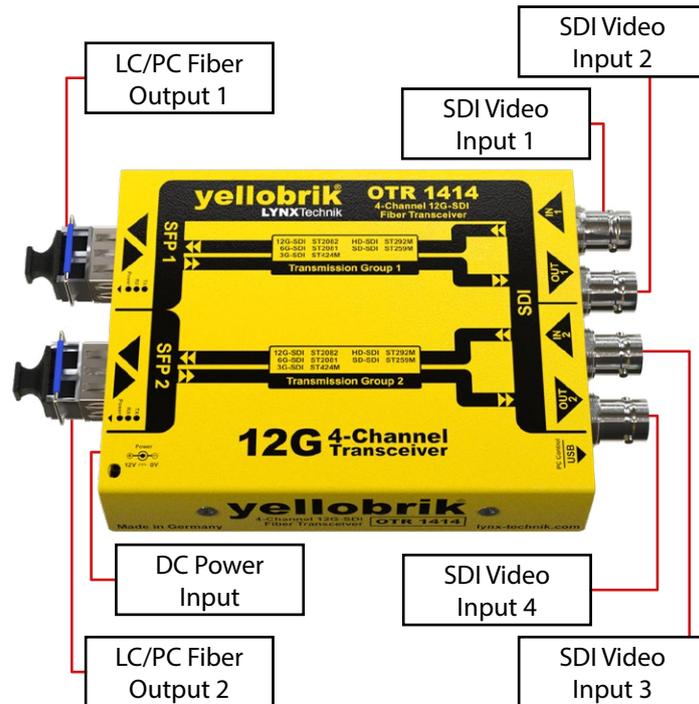

LYNXTechnik | Broadcast Television Equipment

Visit our website for the latest product updates: www.lynx-technik.com

Module laser is active as soon as power is connected, **regardless of LED indication**

Connections

SDI video inputs connect to the 75 Ω BNC connectors. Fiber connections use LC connectors, as shown on the module.

Use the included dust plug to protect the optical connection from dust.

Operation

The OTR 1414 uses two duplex transceiver SFPs, each providing independent fiber transmitter and receiver. Different SDI video formats and standards (12G, 6G, 3G, 1.5G and 270M) can be transmitted and received.

Operation is fully automatic. The input SDI video format is automatically detected, relocked and then transmitted over the fiber optic TX connection. For reception, the optical signal is automatically detected, relocked and provided on the SDI output connection. The module supports hot swapping and hot plugging.

Module LEDs

Power LED

| | | |
|---|-------------------|---------------------------------|
|  | Green | Device Running |
|  | Yellow (blinking) | "Locate Module" function active |
|  | Red (blinking) | Hardware Issues |
|  | Off | Device Not Powered |

TX LED

| | | |
|---|-------|-------------------------------|
|  | Green | Output Signal Active |
|  | Off | No Signal Sent (Laser Active) |

RX LED

| | | |
|---|-------------------------|---------------------------|
|  | Green | Valid Signal Received |
|  | Green/Red (alternating) | Input Format Incompatible |
|  | Off | No Valid Signal Detected |

Power

The module requires a 12V DC power input. The LED indicates when power is connected. If using an external power supply, a clean 7–24V DC source is required.

The OTR 1414 has a maximum power consumption of 3.4W (excluding SFPs).

Power Lead Strain Relief

Yellobrik modules have a small hole above the power connection to prevent the power lead from being accidentally pulled out. Secure the lead using the supplied tie-wrap as shown below.



Optional Mounting Solutions

The optional RFR 1001 mounting bracket allows the module to be installed on any surface and 19" rack rails.



The RFR 1200 rack mount holds up to 14 yellobrik modules and provides power redundancy for all installed devices.

