


Highest quality USB cables for transfer rates up to 480 Mbps, compliant with USB 2.0 standard. Note that standard USB applications require cables with Type A male to Type B male. Type A male to Type A male versions are offered for special applications, these cables must never be used unless the user is sure that their use is correct, as equipment can be damaged in the event of incorrect usage.

Features:

A male to A male Hi-speed USB revision 2.0 Shielded 28AWG/2C+24AWG/2C UL type CM

Specifications:

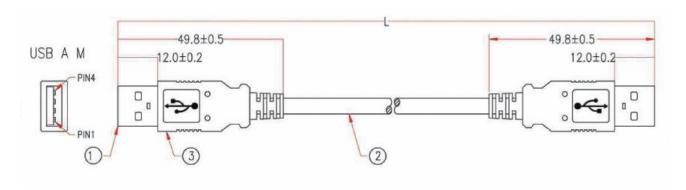

- 1 USB A Male 2.0
- Gold plating 30u" on contacts, white insulator, short type.
- 2 USB 2.0 Cable
- UL style 1 twisted pair 28AWG and 2C 24AWG, 4.7mm OD, Beige jacket.
- 3 Moulded Beige PVC

All materials ROHS compliant.

Wiring:

