


SCM268 TRANSFORMER BALANCED MICROPHONE MIXER

The Shure Model SCM268 is a transformer-balanced, four-channel microphone mixer. Its simple, compact design delivers superior performance and exceptional sound quality with low noise and a flat frequency response.

Versatile in all types of applications, the SCM268 integrates transformer-balanced XLR inputs, a switchable microphone/line level transformer-balanced XLR output, phono jack inputs and output, phantom power, and an auxiliary input channel. It can function as a primary or add-on mixer for sound reinforcement, recording, broadcast, or audio-visual presentation systems.

With the supplied hardware, the mixer's half-rack chassis mounts securely in single or dual rackmount installations. For fixed installations, the SCM268 can be fastened on or below a shelf, counter, or tabletop.

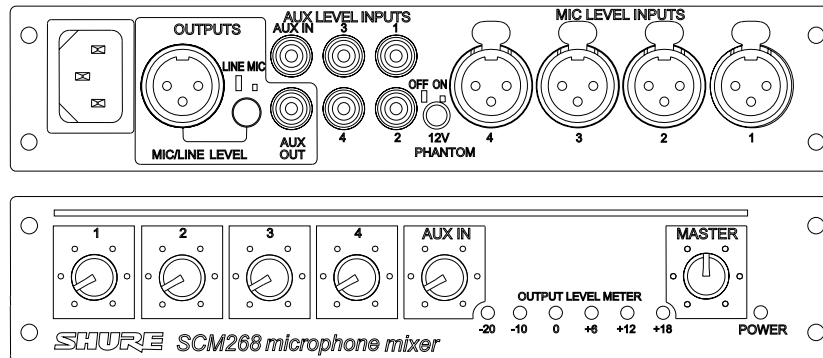

SYSTEM FEATURES

- Four transformer-balanced microphone inputs
- Transformer-balanced output-switchable mic/line level
- Five –10 dB line-level inputs
- Six-segment LED output level meter
- Built-in 12-volt phantom power
- Internal power transformer
- Built-in low-cut filter on microphone inputs (below 80 Hz)

SPECIFICATIONS

Measurement Conditions (unless otherwise specified): Line voltage 120 Vac, 60 Hz (SCM268) or 230 Vac, 50 Hz (SCM268E); full gain; 1 kHz, one channel activated; source impedances: Mic 150 Ω, Aux Level 150 Ω; terminations: Line 600 Ω, Mic 600 Ω, Aux Out 10 kΩ. 12 V phantom power off.

Frequency Response (Ref 1 kHz, controls centered)

Microphone Inputs: 150 Hz to 20 KHz + 2 dB (built-in 80 Hz low-cut)

Auxiliary Inputs: 20 Hz to 20 kHz + 2 dB

Low-Cut Filter (Microphone inputs only)

3dB down at 80 Hz, 6 dB/octave

Gain (typical, controls full clockwise)

Input	Output		
	Mic	Line	Aux Out
Low-impedance mic (150 Ω)	38 dB	76 dB	65 dB
Aux Level	3 dB	40 dB	29 dB

Inputs

Input	Impedance		Input Clipping Level
	Designed for use with	Actual (typical)	
Mic	19-600 Ω	1.2 kΩ	-5 dBV
Aux Level	32 kΩ	21 kΩ	>28 dBV

Outputs

Output	Impedance		Output Clipping Level
	Designed for use with	Actual (typical)	
Mic	low-Z inputs	0.2 Ω	-21 dBV
Line	>600 Ω	72 Ω	+18 dBV
Aux Out	>2 kΩ	870 Ω	+7 dBV

Total Harmonic Distortion

<0.25% at +4 dBu output level (through 22 Hz–22 kHz filter; Input 1 and Master centered, all other controls full counter clockwise)

Hum and Noise (150 Ω source; through 22 Hz–22 kHz filter)

Equivalent Input Hum and Noise: -124 dBV

Output Hum and Noise (through 22 Hz–22 kHz filter; channel controls full counterclockwise)

Master full counterclockwise: -92 dBV

Master full clockwise: -70 dBV

Common Mode Rejection

>80 dB at 1 kHz

Polarity

All inputs to all outputs are non-inverting

Overload and Shorting Protection

Shorting outputs, even for prolonged periods, causes no damage.

Microphone inputs are not damaged by signals up to +10 dBV;

Auxiliary inputs by signals up to +36 dBV

SCM268 MICROPHONE MIXER SPECIFICATION SHEET

Phantom Power

12 Vdc open-circuit through 340Ω series resistance

Operating Voltage

SCM268: 100-120 Vac rated nominal, 50/60 Hz, 60 mA

SCM268E: 220-240 Vac rated nominal, 50/60 Hz, 30 mA

Temperature Range

Operating: -7° to 49° C (20° to 120° F)

Storage: -29° to 74° C (-20° to 165° F)

Overall Dimensions

44 mm H x 218 mm W x 162 mm D

(1.72 x 8.60 x 6.37 inches)

Net Weight

1.20 Kg (2 lbs, 10 oz)

Certifications

SCM268: UL & cUL Listed by Underwriters Laboratories, Inc.

SCM268E: Eligible to bear CE Marking. Conforms to European EMC Directive 89/336/EEC. Meets applicable tests and performance criteria in European Standard EN55103 (1996) parts 1 and 2, for residential (E1) and light industrial (E2) environments.

REPLACEMENT PARTS

Knob, Master (blue).....	95B8752
Knob, Channel Gain (white)	95A8752
Line (Power) Cords:	
SCM268: 100-120 Vac (US/Canada).....	95A8762
SCM268E: 220-240 Vac (EU).....	95A8778
Fuse, SCM268 (5x20 mm, 250V, 80mA, slow-blow).....	80A730
Fuse, SCM268E (5x20 mm, 250V, 40mA, slow-blow)....	80J258
Hardware Kit.....	90AA8100
Link Bars (Bracket).....	53A8443
Single Mount Kit.....	53A8484
Dual Mount Kit.....	53B8484
Optional Accessories Line (Power) Cord, 230-240 Vac (UK).....	95A8713
Line (Power) Cord, 230-240 Vac (UK).....	95A8713



SHURE Incorporated Web Address: <http://www.shure.com>
5800 W. Touhy Avenue, Niles, IL 60714-4608, U.S.A.
Phone: 800-257-4873 Fax: 847-866-2279
In Europe, Phone: 49-7131-72140 Fax: 49-7131-721414
In Asia, Phone: 852-2893-4290 Fax: 852-2893-4055
Elsewhere, Phone: 847-866-2200 Fax: 847-866-2585