




Suitable for Analogue audio input this cable assembly is wired to the Tascam DTRS convention. Belden 7880A low-capacitance, individually screened, 110 Ohm eight-pair cable used. The D-sub 25-pin male connector has a metal-body and sensibly-sized thumb-screws.

**Wiring Convention:**

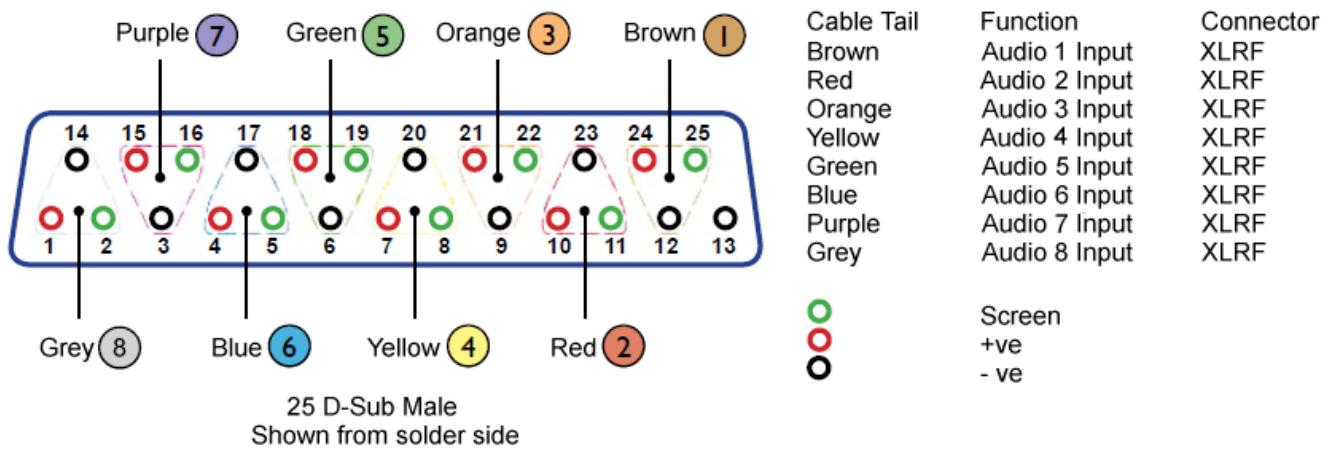

**Approx. Dimensions:**

