



Technical Data Sheet

CANFORD MAINS DISTRIBUTION UNITS

MDU13 AC MDU Twin 7 x IEC out, Twin 3m fixed lead in

MDU13S AC MDU Twin 7x IEC out, Twin 3m fixed lead in, switch

DESCRIPTION

This range of twin input, twin seven-way IEC outlet, AC mains power distribution panels has two 20 amp, unterminated, orange, fixed-lead inlets, each supplying seven outlets, and is housed in a compact 1U rackmount case. The twin input arrangement permits more current to be drawn from the outlets, or for separate supplies to be used within one distribution unit. All versions have on the front panel two illuminated power rocker switches or two un-switched LED power present indicators, plus fuse and bi-colour LED indication of power status for each of the output channels. Inlets and outlets are on the rear panel. An earth stud is fitted.

The fuses on the front panel have an adjacent bi-colour LED. Green illuminated indicates that the circuit is powered correctly. Red illuminated indicates that the fuse has failed.

Outputs are numbered front and rear for easy identification and a designation-strip holder with snap-on cover is fitted on the front panel. The paper strips supplied may be inserted before or after installation; 7.5mm of printable height is available. Templates for printing designation strip labels, available as a DWG file for AutoCAD and compatible applications, can be downloaded from the appropriate product page on the Canford website.

42-8332 Canford MDU13 AC MDU Twin 7 x IEC out, Twin 3m fixed-lead in, green, black

42-8334 Canford MDU13 AC MDU Twin 7 x IEC out, Twin 3m fixed-lead in, red, black

42-8336 Canford MDU13S AC MDU Twin 7 x IEC out, Twin 3m fixed-lead in, green, black

42-8338 Canford MDU13S AC MDU Twin 7 x IEC out, Twin 3m fixed-lead in, red, black

LACING BARS

As IEC cable plugs vary enormously in size and design it is not possible to define a 'universal' connector wire retaining clip. To overcome the challenge of securing all IEC connector types both re-wireable and moulded, a single lacing-bar is fitted as standard. The stainless rods may be fitted in a variety of positions to take account of cable connector size. An additional rod may ordered separately and fitted, which is particularly suitable where connectors of different heights are inserted or where excess cable must be doubled back. An example would be when 'double ended', fixed length, moulded AC mains cords, such as the IEC-Lock types, are used.

A single-rod lacing-bar is fitted, which can be moved to an alternative fixing position if desired. An additional lacing rod may be ordered and fitted. This is particularly useful as it allows excess cable to be doubled back along the second rod. An example would be when 'double ended', fixed length, moulded AC mains cords, such as the IEC-Lock types, are used.


INSTALLATION

THIS EQUIPMENT MUST BE INSTALLED BY SUITABLY QUALIFIED PERSONNEL

WARNING

**HIGH LEAKAGE CURRENT
EARTH CONNECTION ESSENTIAL
BEFORE CONNECTING MAINS VOLTAGES
THIS EQUIPMENT MUST BE EARTHED.
DISCONNECT THE SUPPLY BEFORE REMOVING
TOP COVER.**

CE The CE mark is applied to this product in respect of the Low Voltage Directive. This apparatus complies with the safety requirements of this Directive when used as intended in domestic, commercial, light

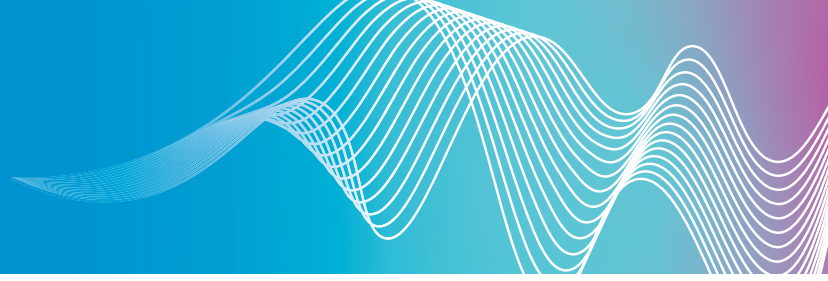

industrial and similar general indoor use. It must not be subjected to splashing or dripping.

The distribution unit should be fixed firmly in a 19" rack using suitable hardware. Appropriate attention **MUST** be paid to protective earthing of the rack itself. Using a suitable, 2.5² mm cable, connect one end to the earthing post on the rear of the unit. Connect the other end to permanent independent earth.

POWER WIRING AND FUSING

Replacement mains fuses must be of a 250V rated European approved type with identical current and time characteristics.

The power outlets should be cabled to the equipment to be powered using cable to suit both the load and the outlet's fuse. The fuses supplied limit the maximum output from each connector to 10 amps. This fuse rating should not be exceeded, however, smaller values may be used. Before the fuses are changed, power to the unit should be disconnected. Replace fuses only with HBC ceramic types to BS EN60127. Fuse values should be chosen to protect the cable used to wire to the powered equipment.

THIS EQUIPMENT MUST BE EARTHED

The distribution units should be provided with an adequate mains power supply.

FAULT CONDITIONS

Under normal operating conditions the "Power Input" LED or mains rocker switch should be illuminated. All channel "Output" LEDs should be green, whether or not a load is present.

If a front panel fuse fails because of a fault with the connected equipment the LED will illuminate red

Remove the load and repair/replace the load equipment. Replace the front panel fuse with that stipulated (see Technical Specifications below.) Re-connect the load and check that the unit is functioning correctly.

Note that even if the panel fuse fails there will still be approximately 100V appearing on the output connector. This is limited to a few milliamps, however. It is essential that any connected equipment is removed before any repair work commences.

MATING CONNECTORS

Mating connectors are NOT included and should be ordered separately as required.

Mains output connectors: 42-153 (Bulgin)
42-054 (Schurter)

Moulded mains leads:

A large range are offered, see AC Mains Power Leads.

Locking, moulded, mains leads:

Patented, locking IEC leads, see AC Mains Power Leads - IEC-Lock.

Mains cable:

33-344 Flexible mains cable, 3 core, 1.5² mm, orange arctic, pvc.

ACCESSORIES

42-0006 Switch guard plates, pair, grey

42-0007 Switch guard plates, pair, black

42-0005 Additional Lacing Bar Kit:

Spare Fasteners

16-023 to 16-085 Rack mount fasteners

16-087 M6 bolt

16-085 Plastic cup washer

Spare designation-strip inserts

45-3082 Label

45-3092 Clear cover

TECHNICAL SPECIFICATION

Input voltage:	198 – 254 VAC
Output load:	10A per outlet
Total load (Un-switched units):	20A for each of the two sections
Total Load (Switched units):	16A for each of the two sections
Outlet fuses:	10A(T) HBC ceramic, to BS 60127
Maximum inrush current:	100A (MDU-S versions)

Dimensions and weight:

Depth excluding lacing-bar	Depth including lacing-bar	Weight (maximum)
130mm	230mm	1.7kg

1U, 19-inch rack mounting, 44 x 483 (h x w) mm.

