
Technical Data Sheet

DELTRON 4MM CONNECTORS

43-110 DELTRON 579 4mm STANDARD PLUG Black
43-112 DELTRON 579 4mm STANDARD PLUG Red
43-120 DELTRON 580 4mm STANDARD PLUG Gold, black
43-122 DELTRON 580 4mm STANDARD PLUG Gold, red

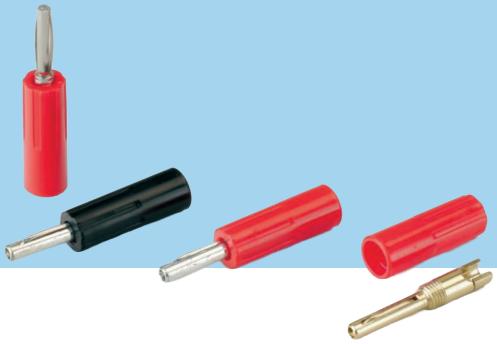

DESCRIPTION

This range of 4mm 'banana' plugs have large solder buckets accepting conductors up to 5.5mm, (10 awg), in diameter. The plug housing accepts cable to a maximum 7.1mm OD. The contact probe features a stainless steel spring which ensures excellent contact. Rating 10A. Available with silver, (579 connectors), or 0.5 micron gold plating (580 connectors).

TECHNICAL SPECIFICATION

MATERIALS

Contact spring	Stainless Steel - BS302
Plug body	Brass TR1 CZ 131
Plug housing	Acetal C 27021 R
Body plating	Silver (579 connectors) Gold – BS EN ISO278474:2008 Cu/Cu/Au0.5 (580 connectors)

Rating	16A
Voltage	50V Max.

