


Technical Data Sheet

E382 DUAL SPEAKER BREAKOUT

42-1382 EMO E382 DUAL SPEAKON BREAKOUT BOX

6x Neutrik SpeakON NL4 connectors, forming two independent breakouts, with the centre connector's channels broken out to separate connectors, where the signal is presented on channel 1. Can be used as a break-out or break-in adapter. Uses include running four speakers from an amplifier which presents four channels on two NL4 outputs.

25 A R.M.S. continuous, 150 V R.M.S. **WARNING: NOT to be used with AC mains power! Do not make or break connections under load!**

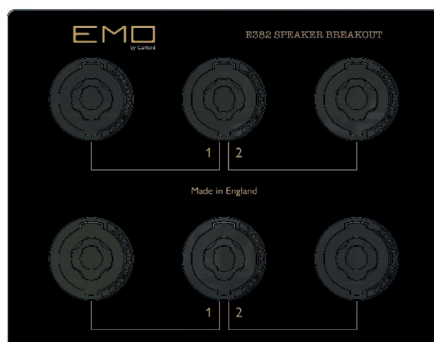

Circuit Diagram

