


To mount an Accessory in the Mounting Kit panel:

1 Remove the two mounting brackets and blanking sheet from the aperture in which you would like to install the accessory. Remove the two nuts to disassemble the pieces, but keep the nuts, screws and washers for reassembly.


2 Remove the two screws from one side of the accessory.





3 Using the two screws removed in step 2, attach one mounting bracket loosely to the side of the accessory with the 'ear' towards the front, pointing outwards.



4 Repeat 2 and 3 for the other side. Push the lid towards the back of the unit as far as it will go, then align the bracket ears with the front edge of the lid. Tighten the screws to secure.



5 Offer the accessory with its mounting brackets up to the reverse side of the Mounting Panel, and fix it in place using the two sets of screws, washers and nuts removed in step 1.

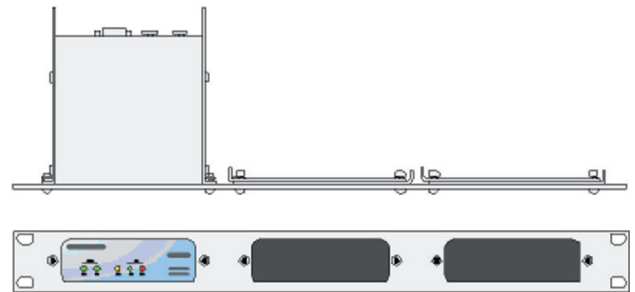

Note that the holes at the rear ends of the brackets may be used as cable tie-off points if desired.

LEGAL DISCLAIMER

MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and DDA are trademarks or registered trademarks of MUSIC Group IP Ltd. © MUSIC Group IP Ltd. 2017 All rights reserved.

LIMITED WARRANTY

For the applicable warranty terms and conditions and additional information regarding MUSIC Group's Limited Warranty, please see complete details online at music-group.com/warranty.