



47-301 DIN 41622 CONNECTOR 30 pin male, solder

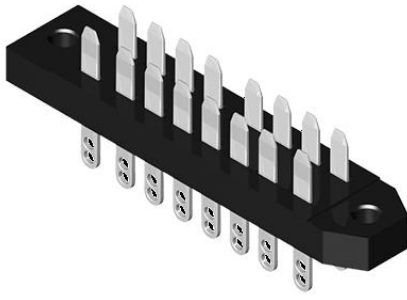

No of contacts	30
Contact type	DIN 41622/41618
Material contact	Copper alloy
Plating contact	Au 0,8 μ
Material insulator	Thermoplast UL94V-0
Rated current	10A
Withstand voltage	875 V _{RMS} for 1 minute
Operating temperature	-20°C to +85°C
Max. processing temp.	230°C for 5 seconds

Dimensions

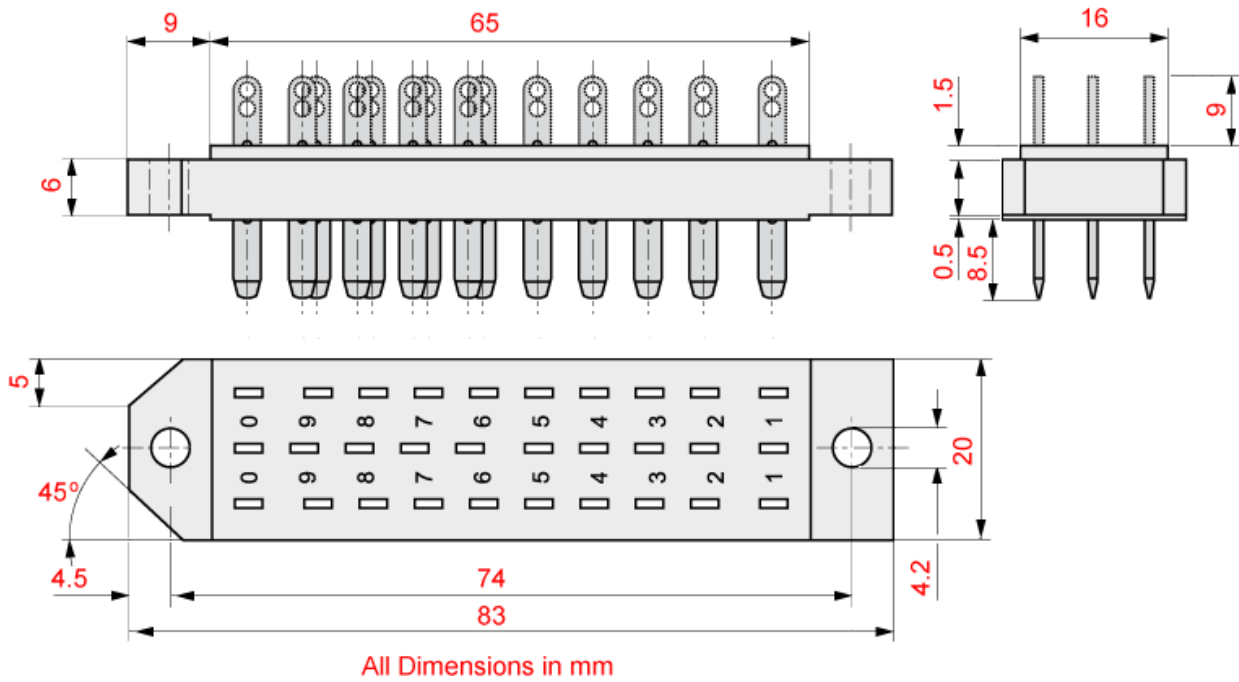

Panel Cutout

