MZH 3042L MZH 3062L MZH 3072L installed sound goosenecks

FEATURES

- Sturdy and elegant metal gooseneck for unobtrusive miking
- RF shielding against intermodulation from wireless equipment/devices
- LED light ring for speech indication
- ac/dc lightring powering



ARCHITECT'S SPECIFICATIONS

The unit shall be streamlined in appearance, with a boom diameter of 8 mm (.31"), an overall length of 40 cm (15.75"), 60 cm (23.6"), or 70 cm (27.5"), and a double bend to facilitate precise positioning. It must also be finished with a durable anti-reflective matte black coating and have a pre-amp housed within its XLR-5 connector housing. The unit must be mountable using a table stand, direct to surface receptacle or via a silent shock mount system. The unit shall accept the ME34, ME35 and ME36 microphone capsules. The unit shall be a Sennheiser MZH 3042L. The unit shall be a MZH 3062L. The unit shall be a MZH 3072L.


TECHNICAL DATA

Connection	XLR 5
Phantom Powering	P 12 - P48 V
Powering voltage lightring	8 - 30 V
Current consumption lightring	18 mA
Lightring connection polarity	no polarity
Coating	
Diameter	6 mm (0.24")
	8 mm (0.32")
	8 mm (0.32")
Length	415 mm (16.34")
	615 mm (24.21")
	715 mm (28.15")
Number of flexible elements	2
Weight (goosenecks)	110 g (35 oz.)
	130 g (41 oz.)
	135 g (43 oz.)
Delivery includes	MZH 3042L
	MZH 3062L
	MZH 3072L



MZH 3042L MZH 3062L MZH 3072L installed sound goosenecks

DIMENSIONS MZH3042L 16.45" [417,8mm] 7.94" [201,7mm] 1.95" [49,5mm] mmmmm 0.24" [6,1mm] MZH3062L 24.26" [616,25mm] 1.95" [49,5mm] .74" ,8mm] 0.24" [6,1mm] 15.75" [400mm] MZH3072L 28.2" [716,36mm] 1.95" [49,5mm] 0.83" [21,1mm] [6,1mm] 19.69"

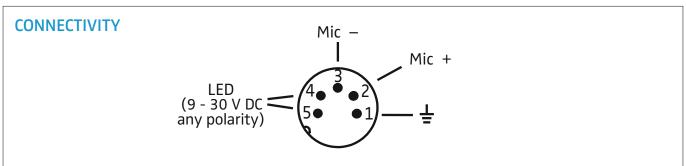

PRODUCT VARIANTS

 MZH 3042-L, black
 Cat. No. 009437

 MZH 3062-L, black
 Cat. No. 504609

 MZH 3072-L, black
 Cat. No. 504610

RECOMMENDED ACCESSORIES

MZT 30L, installation XLR5F connector Cat. No. 009446 MZS 31, shockmount Cat. No. 005087

Sennheiser electronic GmbH & Co. KG Am Labor 1, 30900 Wedemark, Germany www.sennheiser.com