

# AMP1-D8 Series™ 8 CHANNEL MONITOR WITH DOLBY® AC3



1RU in-rack audio monitor processes encoded, multi-channel audio from Dolby Digital® streams decoded from AES.

The AMP1-D8 series monitors (AMP1-D8DA and AMP1-D8MDA-3G) are 1RU in-rack audio monitors capable of outputting and/or displaying encoded, multi-channel audio (up to 8 channels) from Dolby Digital streams decoded from AES. The ability to switch seamlessly between encoded or discrete PCM sources, in addition to providing full, simultaneous demuxed output of the multi-channel source offers a significant new operational capability. The AMP1-D8 series monitors audio from Dolby Digital (AC-3), HD-SDI, SD-SDI, AES/EBU, and analog signal sources.

These units are ideal for use in VTR bays, mobile production vehicles, teleconferencing installations, multimedia systems, satellite links, cable TV facilities, and on-air radio studios. Extended HF response reveals potential problems with audio whine or hiss, and electronic rather than acoustic cancellation of bass frequencies provides positive audible detection of reversed polarity audio feeds. The sleek design provides optimally focused sound for operators in an ultra near field environment (1 to 3 ft.) with performance comparable to that of many separate monitor pairs without installation hassles and awkward speaker placements. This enables a higher SPL for the operator while reducing overall ambient sound and adjacent bay crosstalk.

#### Benefits:

- Supports decoding and playback of Dolby Digital bitstreams
- Select and assign a channel or channel pair to left, right or both speakers, or select a predefined downmix
- 4 presets let you change the entire system configuration with the press of a single button
- Thorough magnetic shielding allows placement next to sensitive equipment and video monitors

#### Features:

- Backlit LED screen displays phase, signal type, Dolby program, and more
- Eight 26-segment tri-color LED bar graphs display simultaneous VU and PPM
- Sum any combination of up to 8 channels to the left and/or right speakers and selected analog outputs
- Premium quality drivers and power amplifiers deliver excellent frequency response and low distortion
- Power 104dB SPL at 2 feet (0.6m)

**ORDER PART #8102-0065 AMP1-D8DA**

**ORDER PART #8102-0075 AMP1-D8MDA-3G**



VIDEO



AUDIO



CAPTIONING



LOUDNESS


info@wohler.com

www.wohler.com


+1 888 5 WOHLER

# AMP1-D8 Series<sup>TM</sup> 8 CHANNEL MONITOR WITH DOLBY® AC3

**Rear Panel** Inputs/Outputs in red available only on model AMP1-D8MDA-3G



**Block Diagram** Inputs/Outputs in red available only on model AMP1-D8MDA-3G

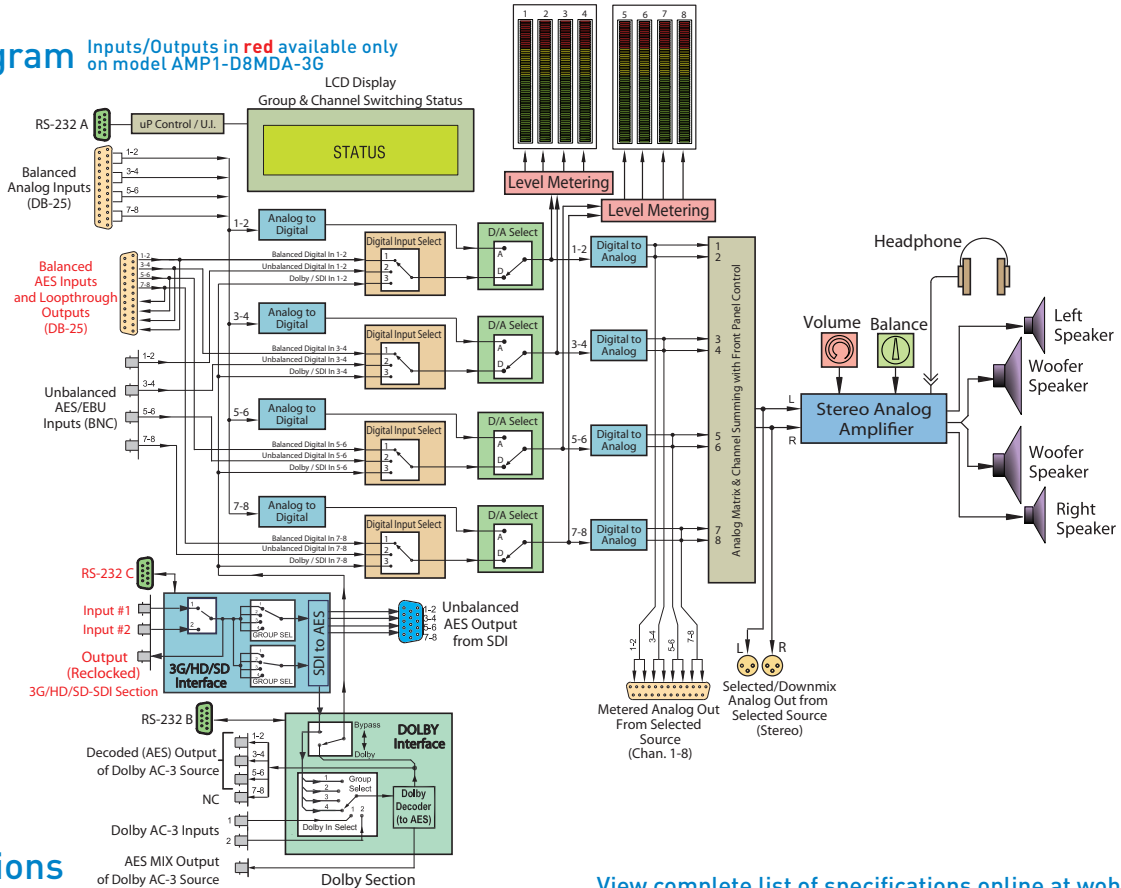

## Specifications

View complete list of specifications online at [wohler.com](http://wohler.com)

Inputs	4 Unbalanced AES/PCM pairs (BNC) 4 AES Balanced pairs (1 DB-25) 2 3G/HD/SD-SDI inputs (BNC) (Available only with model AMP1-D8MDA-3G) 2 Dolby AC-3 (BNC) 8 Channels analog (1 DB-25)
Outputs	4 Balanced AES pairs loop out (DB-25) 1 3G/HD/SD-SDI reclocked output (BNC) (Available only with model AMP1-D8MDA-3G) 4 Decoded Dolby AC-3 (BNC) 8 Channels metered analog (1 DB-25) 4 Balanced AES outputs from SDI (DB-25) (Available only with model AMP1-D8MDA-3G) 1 Unbalanced AES pair mix out of Dolby source 2 Selected downmix analog (2 XLRs)
Power requirements	100 to 240 VAC $\pm$ 10%, 50/60Hz 60 W
Peak acoustic output at 2 feet	104dB SPL

**Wohler USA Headquarters**  
 Wohler Technologies, Inc.  
 31055 Huntwood Avenue  
 Hayward, CA 94544  
 Phone: +1 510 870 0810  
 Fax: +1 510 870 0811  
 Email: [sales@wohler.com](mailto:sales@wohler.com)

**Wohler Asia**  
 Wohler Technologies, Inc.  
 1704 Lucky Commercial Centre  
 103 Des Voeux Road West  
 Sheung Wan, Hong Kong  
 Phone: +852 2851 8325  
 Fax: +852 2850 8182  
 Email: [salesasia@wohler.com](mailto:salesasia@wohler.com)

**Wohler Europe**  
 Wohler Technologies, Inc.  
 Les Perrettes  
 26120 Barcelonne  
 France  
 Phone: +33 970 440 253  
 Fax: +33 1 77 72 59 99  
 Email: [saleseurope@wohler.com](mailto:saleseurope@wohler.com)

**Wohler UK**  
 453 Stroude Road  
 Virginia Water  
 Surrey GU25 4BU  
 United Kingdom  
 Phone: +44 (0) 2081 236 658  
 Fax: +44 (0) 208 181 6500  
 Email: [salesUK@wohler.com](mailto:salesUK@wohler.com)